



FISCHBACH AUTOMATIC CONTROL in casing

type	Fischbach part no.	max. load [A]	dimensions [mm]			weight net [kg]
			L x B	H	M	
supply voltage 230V 1N~ 50 Hz (It is highly recommended to run the motors with at least 150V!)						
FRA 32	6251	3	218	324	-	12,4
FRA 55	6252	5,5	218	324	-	13,4
FRA 80	6253	8	218	324	-	16
FRA 120	6255	12	218	324	-	18

output voltage 0... 230V 1N~ 50 Hz

FRA 32 - 120



signal transmitters (not in standard programm)

Actual Pressure Sensor DV ...

PVC casing with tube fixings for positive and negative pressure readings. The casing contains a rolled siphon diaphragm which effects a signal change at the output, via built in electronics, proportional to the pressure.


Must be used in conjunction with:

Pre Set - Pressure DS...

For separate use: (see table)

Manual Remote Adjuster HF 10

output voltage 0...10 V-

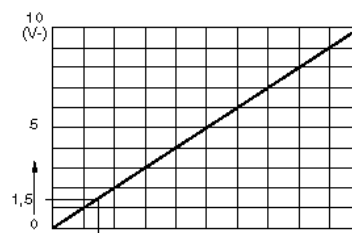

signal proportional to measuring or setting range

0	50	100 %
0	50	100 Pa
0	500	1000 Pa
-11°C	+2,5	+20 °C
+ 9°C	23,5	+40 °C
+39°C	52,2	+70 °C

correlation of range of sensors and pre-sets

Actual pressure sensor DV

