Series: ROOF TOP UNIT TYPE 40, flat
with FISCHBACH COMPACT FAN
Type CE with forward curved blades

FISCHBACH
Luft- und Ventilatorentechnik GmbH

Type: 40-2 CE5-670/E15

ErP KONFORM

CE -conform

UK CA

manufacturer:
Fischbach Luft- und Ventilatorentechnik GmbH
Am Hellerberg 22-24
D-57290 Neunkirchen
phone: ++49(0)2735/777-0
telefax: ++49(0)2735/770-133
internet: www.fischbach-luft.de
email: info@fischbach-luft.de

Technical Data

weight:	(kg)	36
mat. housing:	verzinkt/steel, galvanized/acier gavanisé	
material impeller:	verzinkt/steel, galvanized/acier gavanisé	
direction of rotation:	links/left/à gauche	
motor protection class:	IP 65	
insulation class:	F	
motor protection:	thermal contact	

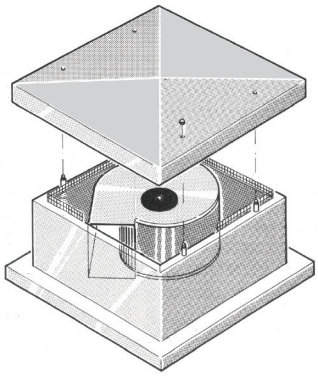

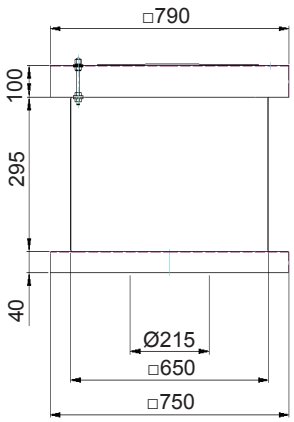

connection plan
0.11-1 I.

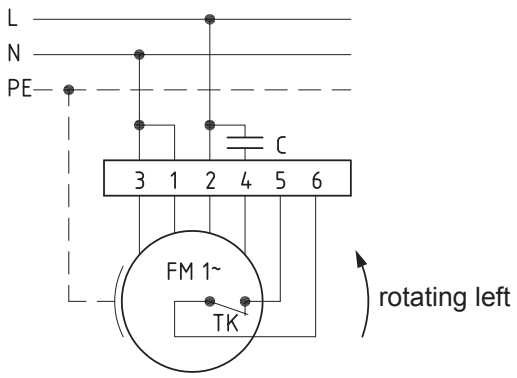

the silent one

Series: ROOF TOP UNIT TYPE 40, flat
with FISCHBACH COMPACT FAN
Type CE with forward curved blades

FISCHBACH
Luft- und Ventilatorentechnik GmbH

Type: 40-2 CE5-670/E15

Erp	2013	2015 **x**	2018

Performance data

main voltage:	(V)	230 (1~)
frequency:	(Hz)	50
current max.:	(A)	1,88
power input max.:	(kW)	0,42
air flow volume max.:	(m³/h)	2070
statical pressure max.:	(Pa)	426
speed max.:	(rpm)	1412
supply air temperature:	(°C)	-20... +70
capacitor:	(µF)	10

ErP-Data:

total efficiency fan (η_e):	(%)	34,6
installation category:		A
efficiency category:		static
efficiency grade: N	(%)	44
target efficiency (η_{target}):	(%)	34,3
speed controller		no
year of manufacturing		since 2015

manufacturer: Fischbach Luft- und Ventilatorentechnik GmbH
D-57290 Neunkirchen / HRB 5804 Siegen

order no.		58040010
power input:	(kW)	0,29
air flow volume:	(m³/h)	1130
statical pressure:	(Pa)	320
speed:	(rpm)	1263
specific ratio:		1

disassemling/recycling/disposal: see page decommission
installation/operation/maintenance: see operating and mounting instructions
measurement for determination of efficiency without additional items

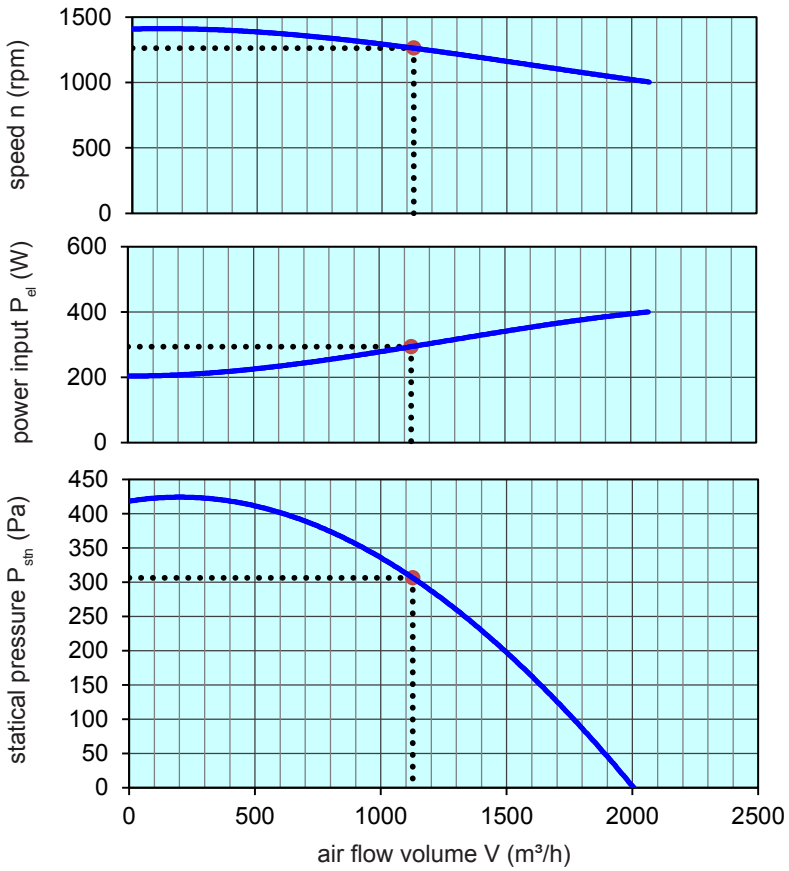

Speed controller / accessories / sound data, please see in the appropriate table

Technical documentation according to page: **General information**